

TPO

ROOFING SYSTEMS



THE AFFORDABLE WHITE ROOF

INSTALLED COST VALUE

Wide membrane sheets mean fewer seams and that means lower labor costs compared to other roofing systems.

LONGER ROOF LIFE

Thicker top ply means highly resistant to the harshest weather elements. Resistant to ponding water and fungus.

HEAT-WELDED SEAMS FOR STRENGTH AND WATERTIGHT INTEGRITY

Mule-Hide TPO roofs use a heat-welding process that fuses the membrane seams for better wind uplift performance and fewer leaks. Heat-weld seams help to prevent roof leaks and thicker membranes offer superior puncture resistance.

ADDED VALUE

- Energy efficient & environmentally friendly
- Easier to clean & maintain
- Resistant to rooftop traffic
- Minimal disruption & safe installation



“The name trusted in roofing since 1906”





IDEAL FOR BOTH NEW CONSTRUCTION AND REROOFING


MULE-HIDE TPO ROOFING SYSTEMS

Thermoplastic polyolefin based for superior strength and weatherability, your Mule-Hide TPO Roof is lightweight yet highly resistant to tears, impact damage, punctures and wind uplift. Ideal for both new construction and reroofing, our reinforced membrane easily handles building thermal expansion and contraction.

- Membrane meets or exceeds ASTM performance standards
- UL and FM listed assemblies available
- Extensive warranty program

A MULE-HIDE TPO ROOF IS RESISTANT TO MANY ORGANIC & INORGANIC CHEMICAL COMPOUNDS

- Animal fats, animal oils, eggs and egg powder
- Boric acid, freon, fertilizer salts and liquids
- Brick/masonry cleaners
- Gelatin, glue and glycol (liquid)
- Iron sulphate and mercury
- Oleic acid (unsaturated fatty acid)
- Oxalic acid (bleaching agent)
- Peanut oil and urea (liquid)
- Photo developers and fixing baths
- Soap solutions and starch (liquid or syrup)
- Stearic acid, sulfuric acid, sea and waste water

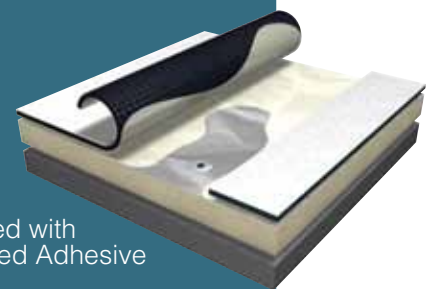

TPO
Fully-Adhered with
Solvent-Based Adhesive



“The name trusted in roofing since 1906”

Customer Line: 800-786-1492
www.mulehide.com

Check our website monthly for the latest updates & technical bulletins.

National Support Center • 1195 Prince Hall Drive • Beloit, WI 53511
tel. 608.365.3111 • fax. 608.365.7852

The information herein should not be considered all-inclusive and should always be accompanied by a review of the Mule-Hide specifications and guidelines and good application practices.

This information herein is based upon data and knowledge considered to be true and accurate at the time of printing and is provided for the reader's consideration, investigation and verification. No statement made by anyone may supersede this information, except when done in writing by Mule-Hide Products Co., Inc. Mule-Hide Products Co., Inc. does not warrant any results to be obtained. Statements concerning possible use of Mule-Hide products are made without knowledge of your particular roof and such an application may not be fit for your particular purpose. MULE-HIDE DISCLAIMS ALL WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, except written warranties attached to Mule-Hide products and written warranties signed by an officer of Mule-Hide.

Visit the Mule-Hide website at www.mulehide.com prior to any installation for updated technical specifications and details.
Mule-Hide is a U.S. registered trademark. All rights reserved.

FOR MORE INFORMATION PLEASE CONTACT:

